

Understanding M-values

By Erik C. Baker, P.E.

In conjunction with an array of hypothetical "tissue" compartments, gas loading calculations and M-values compose the major elements of the dissolved gas or "Haldanian" decompression model. Through the use of widely-available desktop computer programs, technical divers rely on this model for their decompression safety. A good understanding of M-values can help divers to determine appropriate conservatism factors and evaluate the adequacy of various decompression profiles for a particular dive.

What are M-values? The term "M-value" was coined by Robert D. Workman in the mid-1960's when he was doing decompression research for the U.S. Navy Experimental Diving Unit (NEDU). Workman was a medical doctor with the rank of Captain in the Medical Corps of the U.S. Navy.

The "M" in M-value stands for "Maximum." For a given ambient pressure, an M-value is defined as the maximum value of inert gas pressure (absolute) that a hypothetical "tissue" compartment can "tolerate" without presenting overt symptoms of decompression sickness (DCS). M-values are representative limits for the tolerated gradient between inert gas pressure and ambient pressure in each compartment. Other terms used for M-values are "limits for tolerated overpressure," "critical tensions," and "supersaturation limits." The term M-value is commonly used by decompression modelers.

HISTORICAL BACKGROUND

In the dissolved gas or "Haldanian" decompression model, gas loading calculations for each hypothetical "tissue" compartment are compared against "ascent limiting criteria" to determine the safe profile for ascent. In the early years of the model, including the method developed by John S. Haldane in 1908, the ascent limiting criteria was in the form of "supersaturation ratios." For example, Haldane found that a diver whose "tissues" were saturated by breathing air at a depth of 33 fsw could ascend directly to the surface (sea level) without experiencing symptoms of DCS. Because the ambient pressure at 33 fsw depth is twice that at sea level, Haldane concluded that a ratio of 2:1 for tolerated overpressure above ambient could be used as the ascent limiting criteria. This approximate

ratio was used by Haldane to develop the first decompression tables. In later years, and up until the 1960's, other ratios were used by various modelers for the different half-time compartments. Most of the U.S. Navy decompression tables were calculated using this supersaturation ratio method.

However, there was a problem. Many of the tables produced by this method were deficient when it came to deeper and longer dives. Robert Workman began a systematic review of the decompression model including previous research that had been performed by the U.S. Navy. He arrived at some important conclusions. First of all, he recognized that Haldane's original ratio of 2:1 (based on air) was really a ratio of 1.58:1 if you considered only the partial pressure of the inert gas in air - nitrogen. [By that time in decompression research it was known that oxygen was not a significant factor in DCS; it was the inert gases like nitrogen and helium that were the culprits.] In his review of the research data, Workman found that the "tissue ratios" for tolerated overpressure varied by half-time compartment and by depth. The data showed that the faster half-time compartments tolerated a greater overpressure ratio than the slower compartments, and that for all compartments the tolerated ratios became less with increasing depth. Then, instead of using ratios, Workman described the maximum tolerated partial pressure of nitrogen and helium for each compartment at each depth as the "M-value." Next, he made a "linear projection" of these M-values as a function of depth and found that it was a reasonably close match to the actual data. He made the observation that "a linear projection of M-values is useful for computer programming as well."

THE WORKMAN M-VALUES

Workman's presentation of M-values in the form of a linear equation was a significant step in the evolution of the dissolved gas decompression model. His M-values established the concept of a linear relationship between depth pressure [or ambient pressure] and the tolerated inert gas pressure in each "tissue" compartment. This concept is an important element of the present-day dissolved gas model as applied by a variety of modelers.

Workman expressed his M-values in the slope-intercept form of a linear equation (see Figure 1). His surfacing value was designated MO [pronounced "M naught"]. This was the intercept value in the linear equation at zero depth pressure (gauge) at sea level. The slope in the linear equation was designated ΔM [pronounced "delta M"] and represented the change in M-value with change in depth pressure.

THE BUHLMANN M-VALUES

Professor Albert A. Buhlmann, M.D., began doing decompression research in 1959 in the Laboratory of Hyperbaric Physiology at the University Hospital in Zurich, Switzerland. Buhlmann continued his research for over thirty years and made a number of important contributions to decompression science. In 1983 he published the first edition (in German) of a successful book entitled *Decompression - Decompression Sickness*. An English translation of the book was published in 1984. Buhlmann's book was the first nearly complete reference on making decompression calculations that was widely-available to the diving public. As a result, the "Buhlmann algorithm" became the basis for most of the world's in-water decompression computers and do-it-yourself desktop computer programs. Three more editions of the book were published in German in 1990, 1993, and 1995 under the name *Tauchmedizin* or "Diving Medicine." [An English translation of the 4th Edition of the book (1995) is in preparation for publication].

Buhlmann's method for decompression calculations was similar to the one that Workman had prescribed.

This included M-values which expressed a linear relationship between ambient pressure and tolerated inert gas pressure in the hypothetical "tissue" compartments. The major difference between the two approaches was that Workman's M-values were based on depth pressure (i.e. diving from sea level) and Buhlmann's M-values were based on absolute pressure (i.e. for diving at altitude). This makes sense, of course, since Workman was concerned with the diving activities of the U.S. Navy (presumably performed at sea level) while Buhlmann was concerned with diving activities in the high mountain lakes of Switzerland.

Buhlmann published two sets of M-values which have become well-known in diving circles; the ZH-L12 set from the 1983 book, and the ZH-L16 set(s) from the 1990 book (and later editions). The "ZH" in these designations stands for "Zurich" (named after his hometown), the "L" stands for "limits," and the "12" or "16" represents the number of pairs of coefficients (M-values) for the array of half-time compartments for helium and nitrogen. The ZH-L12 set has twelve pairs of coefficients for sixteen half-time compartments and these M-values were determined empirically (i.e. with actual decompression trials). The ZH-L16A set has sixteen pairs of coefficients for sixteen half-time compartments and these M-values were mathematically-derived from the half-times based on the tolerated surplus volumes and solubilities of the inert gases. The ZH-L16A set of M-values for nitrogen is further divided into subsets B and C because the mathematically-derived set A was found empirically not to be conservative enough in the middle compartments. The modified set B (slightly more conservative) is suggested for table calculations and the modified set C (somewhat more conservative) is suggested for use with in-water decompression computers which calculate in real-time.

Similar to the Workman M-values, the Buhlmann M-values are expressed in the slope-intercept form of a linear equation (see Figure 1). The Coefficient a is the intercept at zero ambient pressure (absolute) and the Coefficient b is the reciprocal of the slope. [Note: the Coefficient a does not imply that humans

can withstand zero absolute pressure!
 This is simply a mathematical requirement
 for the equation. The lower limit for
 ambient pressure in the application of the

Buhlmann M-values is on the order of 0.5
 atm/bar.]

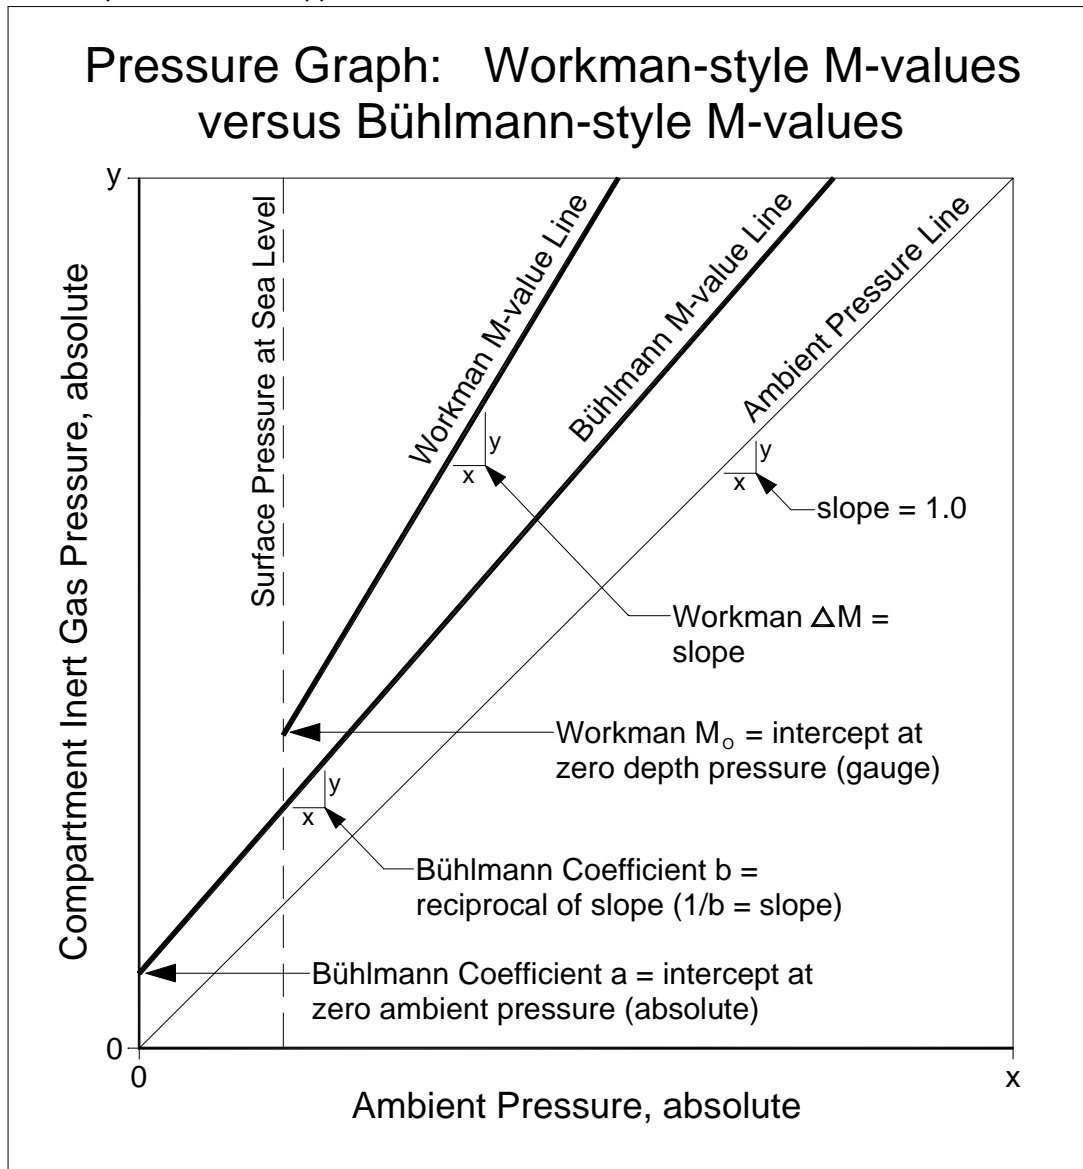


Figure1

many custom decompression tables in use
 by technical divers.

DCAP AND DSAT M-VALUES

Many technical divers will recognize the 11F6 set of M-values used by Hamilton Research's Decompression Computation and Analysis Program (DCAP). This set or "matrix" of M-values was determined by Dr. Bill Hamilton and colleagues during development of new air decompression tables for the Swedish Navy. In addition to air diving, the 11F6 M-values have worked well for trimix diving and are the basis for

Many sport divers are familiar with the Recreational Dive Planner (RDP) distributed by the Professional Association of Diving Instructors (PADI). The M-values used for the RDP were developed and tested by Dr. Raymond E. Rogers, Dr. Michael R. Powell, and colleagues with Diving Science and Technology Corp. (DSAT), a corporate affiliate of PADI. The DSAT M-values were empirically verified with extensive in-water diver testing and Doppler monitoring.

COMPARISON OF M-VALUES

Tables 1 thru 4 present a comparison of M-values for nitrogen and helium between the various Haldanian decompression algorithms discussed in this article. All M-values are presented in Workman-style format. An evolution or refinement in the M-values is evident from Workman (1965) to Buhlmann (1990). The general trend has

been to become slightly more conservative. This trend reflects a more intensive validation process (empirical testing) and includes the use of Doppler ultrasound monitoring for the presence and quantity of "silent bubbles" (bubbles which are detectable in the circulation but are not associated with overt symptoms of decompression sickness).

M-value Mathematics		
Linear Equations:	$y = mx + b$ format	$x = (y - b) / m$ format
Workman-style:	$M = \Delta M \cdot \text{Depth} + M_o$	Tolerated Depth = $(P - M_o) / \Delta M$
Bühlmann-style:	$P_{t.tol. i.g.} = (P_{amb.} / b) + a$	$P_{amb.tol.} = (P_{t.i.g.} - a) \cdot b$
Workman to Bühlmann ← Conversions → Bühlmann to Workman		
	$a = M_o - \Delta M \cdot P_{amb. (surface at sea level)}$	$M_o = a + P_{amb. (surface at sea level)} / b$
	$b = 1 / \Delta M$	$\Delta M = 1 / b$

CONSISTENCY OF M-VALUES

One observation that can be made about the comparison between the M-values of the various algorithms is that there is not a great difference between them. In other words, there appears to be a certain consistency between the values determined by various independent researchers around the globe. This is a good sign as it indicates that the science has determined a relatively consistent threshold for symptoms of decompression sickness across the human population.

FORMAT FOR M-VALUES

M-values are often expressed in the form of a linear equation as in the Workman-style or the Buhlmann-style. This format is ideal for computer programming since it allows the M-values to be calculated "on-the-fly" as they are needed. The linear format permits the display of M-value lines on the pressure graph as well.

M-values can also be expressed in the form of a "matrix" or table. This is simply where the M-values for each half-time compartment and each stop depth are pre-calculated and arranged in columns and rows. This format is useful

for detailed comparisons and analysis. Some of the early dive computers and desktop computer programs used the table format to "look up" M-values for each stop during the calculation process.

Workman Definitions:

P = inert gas pressure (absolute) in hypothetical "tissue" compartment

M = tolerated inert gas pressure (absolute) in hypothetical "tissue" compartment

Depth = depth pressure (gauge) measured from surface at sea level

Tolerated Depth = tolerated depth pressure (gauge) measured from surface at sea level

M_o = intercept at zero depth pressure (gauge); surfacing M-value at sea level

ΔM = slope of M-value line

Bühlmann Definitions:

$P_{t.tol. i.g.}$ = tolerated inert gas pressure (absolute) in hypothetical "tissue" compartment

$P_{i.g.}$ = inert gas pressure (absolute) in hypothetical "tissue" compartment

$P_{amb.}$ = ambient pressure (absolute)

$P_{amb.tol.}$ = tolerated ambient pressure (absolute)

a = intercept at zero ambient pressure (absolute)

b = reciprocal of slope of M-value line

Table 1: Comparison of M-values for Nitrogen Between Various Haldanian Decompression Algorithms																					
American System of Pressure Units - feet of sea water (fsw)																					
Workman M-values (1965)				Bühlmann ZH-L ₁₂ M-values (1983)				DSAT RDP M-values (1987)			DCAP MF11F6 M-values (1988)				Bühlmann ZH-L16 M-values (1990)						
Cpt No.	HT min	M ₀ fsw	ΔM slope	Cpt No.	HT min	M ₀ fsw	ΔM slope	Cpt No.	HT min	M ₀ fsw	Cpt No.	HT min	M ₀ fsw	ΔM slope	Cpt No.	HT min	M ₀ fsw	M ₀ fsw	M ₀ fsw	M ₀ fsw	ΔM slope
				1	2.65	111.9	1.2195								1	4.0	106.4	106.4	106.4		1.9082
1	5	104	1.8					1	5	99.08	1	5	104.0	1.30	1b	5.0	97.3	97.3	97.3		1.7928
2	10	88	1.6	2	7.94	89.1	1.2195	2	10	82.63	2	10	80.5	1.05	2	8.0	83.2	83.2	83.2		1.5352
				3	12.2	75.2	1.2121								3	12.5	73.8	73.8	73.8		1.3847
3	20	72	1.5	4	18.5	68.8	1.1976	3	20	66.89				4	18.5	66.8	66.8	66.8		1.2780	
				5	26.5	63.5	1.1834	4	30	59.74	3	25	62.3	1.08	5	27.0	62.3	62.3	60.8		1.2306
4	40	56	1.4	6	37	57.3	1.1628	5	40	55.73				6	38.3	58.5	57.4	55.6		1.1857	
				7	53	53.2	1.1494	6	60	51.44	4	55	48.6	1.06	7	54.3	55.2	54.1	52.3		1.1504
5	80	54	1.3	8	79	51.9	1.1236	7	80	49.21				8	77.0	52.3	51.7	50.1		1.1223	
								8	100	47.85	5	95	45.4	1.04	9	109	49.9	49.9	48.5		1.0999
6	120	52	1.2	9	114	51.9	1.1236	9	120	46.93											
7	160	51	1.15	10	146	50.2	1.0707	10	160	45.78	6	145	44.7	1.02	10	146	48.2	48.2	47.2		1.0844
8	200	51	1.1	11	185	50.2	1.0707	11	200	45.07	7	200	44.1	1.01	11	187	46.8	46.8	46.1		1.0731
9	240	50	1.1	12	238	47.3	1.0593	12	240	44.60					12	239	45.6	45.6	45.1		1.0635
				13	304	42.6	1.0395				8	285	44.0	1.0	13	305	44.5	44.1	44.1		1.0552
				14	397	42.6	1.0395	13	360	43.81	9	385	44.0	1.0	14	390	43.5	43.5	43.1		1.0478
				15	503	42.6	1.0395	14	480	43.40	10	520	44.0	1.0	15	498	42.6	42.6	42.4		1.0414
				16	635	42.6	1.0395								16	635	41.8	41.8	41.8		1.0359
											11	670	43.5	1.0							

Cpt = Compartment HT = Half-time M₀ = Surfacing M-value (sea level = 1 atm = 33 fsw = 1.01325 bar) ΔM = slope of M-value line

Table 2: Comparison of M-values for Nitrogen Between Various Haldanian Decompression Algorithms																					
European System of Pressure Units - meters of sea water (msw)																					
Workman M-values (1965)				Bühlmann ZH-L ₁₂ M-values (1983)				DSAT RDP M-values (1987)			DCAP MM11F6 M-values (1988)				Bühlmann ZH-L16 M-values (1990)						
Cpt No.	HT min	M ₀ msw	ΔM slope	Cpt No.	HT min	M ₀ msw	ΔM slope	Cpt No.	HT min	M ₀ msw	Cpt No.	HT min	M ₀ msw	ΔM slope	Cpt No.	HT min	M ₀ msw	M ₀ msw	M ₀ msw	M ₀ msw	ΔM slope
				1	2.65	34.2	1.2195								1	4.0	32.4	32.4	32.4		1.9082
1	5	31.7	1.8					1	5	30.42	1	5	31.90	1.30	1b	5.0	29.6	29.6	29.6		1.7928
2	10	26.8	1.6	2	7.94	27.2	1.2195	2	10	25.37	2	10	24.65	1.05	2	8.0	25.4	25.4	25.4		1.5352
				3	12.2	22.9	1.2121								3	12.5	22.5	22.5	22.5		1.3847
3	20	21.9	1.5	4	18.5	21.0	1.1976	3	20	20.54				4	18.5	20.3	20.3	20.3		1.2780	
				5	26.5	19.3	1.1834	4	30	18.34	3	25	19.04	1.08	5	27.0	19.0	19.0	18.5		1.2306
4	40	17.0	1.4	6	37	17.4	1.1628	5	40	17.11				6	38.3	17.8	17.5	16.9		1.1857	
				7	53	16.2	1.1494	6	60	15.79	4	55	14.78	1.06	7	54.3	16.8	16.5	15.9		1.1504
5	80	16.4	1.3	8	79	15.8	1.1236	7	80	15.11				8	77.0	15.9	15.7	15.2		1.1223	
								8	100	14.69	5	95	13.92	1.04	9	109	15.2	15.2	14.7		1.0999
6	120	15.8	1.2	9	114	15.8	1.1236	9	120	14.41											
7	160	15.5	1.15	10	146	15.3	1.0707	10	160	14.06	6	145	13.66	1.02	10	146	14.6	14.6	14.3		1.0844
8	200	15.5	1.1	11	185	15.3	1.0707	11	200	13.84	7	200	13.53	1.01	11	187	14.2	14.2	14.0		1.0731
9	240	15.2	1.1	12	238	14.4	1.0593	12	240	13.69					12	239	13.9	13.9	13.7		1.0635
				13	304	12.9	1.0395				8	285	13.50	1.0	13	305	13.5	13.4	13.4		1.0552
				14	397	12.9	1.0395	13	360	13.45	9	385	13.50	1.0	14	390	13.2	13.2	13.1		1.0478
				15	503	12.9	1.0395	14	480	13.33	10	520	13.40	1.0	15	498	12.9	12.9	12.9		1.0414
				16	635	12.9	1.0395								16	635	12.7	12.7	12.7		1.0359
											11	670	13.30	1.0							

Cpt = Compartment HT = Half-time M₀ = Surfacing M-value (sea level = 10 msw = 1.0 bar) ΔM = slope of M-value line

M-VALUE CHARACTERISTICS

M-value sets can be classified into two categories, no-decompression sets and decompression sets. No-decompression M-values are surfacing values only. The DSAT RDP M-values are an example. No-stop dive profiles are designed so that the calculated gas loadings in the compartments do not exceed the surfacing M-values. This allows for direct ascent to the surface at any time during

the dive. Some no-decompression algorithms account for ascent and descent rates in the calculations.

Decompression M-values are characterized by having a slope parameter which determines the change in M-value with change in ambient pressure. The value of the slope parameter will vary depending on the half-time of the hypothetical "tissue" compartment. Generally, faster half-time compartments will have a greater slope than slower half-time compartments. This

reflects the observation that faster

Table 3: Comparison of M-values for Helium Between Various Haldanian Decompression Algorithms American System of Pressure Units - feet of sea water (fsw)

Workman M-values (1965)				Bühlmann ZH-L ₁₂ M-values (1983)				Bühlmann ZH-L16A M-values (1990)			
Cpt No.	HT min	M ₀ fsw	ΔM slope	Cpt No.	HT min	M ₀ fsw	ΔM slope	Cpt No.	HT min	M ₀ fsw	ΔM slope
				1	1.0	111.9	1.2195	1	1.51	134.5	2.3557
								1b	1.88	121.9	2.0964
				2	3.0	89.1	1.2195	2	3.02	102.5	1.7400
1	5	86	1.5	3	4.6	75.2	1.2121	3	4.72	89.4	1.5321
				4	7.0	68.8	1.1976	4	6.99	79.7	1.3845
2	10	74	1.4	5	10	63.5	1.1834	5	10.21	73.6	1.3189
				6	14	57.3	1.1628	6	14.48	68.2	1.2568
3	20	66	1.3	7	20	53.2	1.1494	7	20.53	63.7	1.2079
				8	30	51.9	1.1236	8	29.11	59.8	1.1692
4	40	60	1.2	9	43	51.9	1.1236	9	41.20	57.1	1.1419
				10	55	52.4	1.0799	10	55.19	55.1	1.1232
5	80	56	1.2	11	70	52.4	1.0799	11	70.69	54.0	1.1115
				12	90	52.4	1.0799	12	90.34	53.3	1.1022
6	120	54	1.2	13	115	52.4	1.0799	13	115.29	53.1	1.0963
7	160	54	1.1	14	150	52.4	1.0799	14	147.42	52.8	1.0904
8	200	53	1.0	15	190	52.4	1.0799	15	188.24	52.6	1.0850
9	240	53	1.0	16	240	52.4	1.0799	16	240.03	52.3	1.0791

Cpt = Compartment HT = Half-time ΔM = slope of M-value line
M₀ = Surfacing M-value (sea level = 1 atm = 33 fsw = 1.01325 bar)

Table 4: Comparison of M-values for Helium Between Various Haldanian Decompression Algorithms European System of Pressure Units - meters of sea water (msw)

Workman M-values (1965)				Bühlmann ZH-L ₁₂ M-values (1983)				Bühlmann ZH-L16A M-values (1990)			
Cpt No.	HT min	M ₀ msw	ΔM slope	Cpt No.	HT min	M ₀ msw	ΔM slope	Cpt No.	HT min	M ₀ msw	ΔM slope
				1	1.0	34.2	1.2195	1	1.51	41.0	2.3557
								1b	1.88	37.2	2.0964
				2	3.0	27.2	1.2195	2	3.02	31.2	1.7400
1	5	26.2	1.5	3	4.6	22.9	1.2121	3	4.72	27.2	1.5321
				4	7.0	21.0	1.1976	4	6.99	24.3	1.3845
2	10	22.5	1.4	5	10	19.3	1.1834	5	10.21	22.4	1.3189
				6	14	17.4	1.1628	6	14.48	20.8	1.2568
3	20	20.1	1.3	7	20	16.2	1.1494	7	20.53	19.4	1.2079
				8	30	15.8	1.1236	8	29.11	18.2	1.1692
4	40	18.3	1.2	9	43	15.8	1.1236	9	41.20	17.4	1.1419
				10	55	15.9	1.0799	10	55.19	16.8	1.1232
5	80	17.0	1.2	11	70	15.9	1.0799	11	70.69	16.4	1.1115
				12	90	15.9	1.0799	12	90.34	16.2	1.1022
6	120	16.4	1.2	13	115	15.9	1.0799	13	115.29	16.1	1.0963
7	160	16.4	1.1	14	150	15.9	1.0799	14	147.42	16.1	1.0904
8	200	16.1	1.0	15	190	15.9	1.0799	15	188.24	16.0	1.0850
9	240	16.1	1.0	16	240	15.9	1.0799	16	240.03	15.9	1.0791

Cpt = Compartment HT = Half-time ΔM = slope of M-value line
M₀ = Surfacing M-value (sea level = 10 msw = 1.0 bar)

compartments tolerate greater overpressure than slower compartments. If the slope is greater than 1.0 then the M-value line "expands" on the pressure graph and that compartment will tolerate greater overpressure gradients with increasing depth. A fixed slope of 1.0 means that the compartment will tolerate the same overpressure gradient regardless of depth. In all cases, the value of the slope can never be less than 1.0. Otherwise, the M-value line would cross under the ambient pressure line at some point and this would represent an "illogical" situation whereby the compartment could not tolerate even the ambient pressure.

THE AMBIENT PRESSURE LINE

The ambient pressure line is an all-important reference line on the pressure graph. Passing through the origin, it has a slope of 1.0 and simply represents the

collection of points where the compartment inert gas loading will be equal to ambient pressure. This is important because when the inert gas loading in a compartment goes above the ambient pressure line, an overpressure gradient is created. An M-value line represents the established limit for tolerated overpressure gradient above the ambient pressure line.


THE DECOMPRESSION ZONE

The "decompression zone" is the region on the pressure graph between the ambient pressure line and the M-value line (see Figure 3). Within the context of the dissolved gas model, this zone represents the functional area in which decompression takes place. In theory, a positive gradient above ambient pressure is desirable in order for a compartment to "off-gas" or "decompress." In some instances, such as with a high fraction of oxygen in the mix, a compartment will be able to off-gas even though the total inert gas partial pressure is less than ambient pressure. An "efficient" decompression profile is characterized by leading compartment gas loadings which plot within the decompression zone. The gas loadings for various half-time compartments will cross into and then out of the decompression zone during the decompression profile depending upon which compartment is "leading" or "controlling" at the time. Generally, the faster compartments will cross into the decompression zone first and be leading (gas loadings closest to M-value lines) and then the rest of the decompression profile will be controlled by the slower compartments in sequence.

MULTIPLE INERT GASES

Present-day dissolved gas models employ a concept for multiple inert gases which states that the total inert gas pressure in a hypothetical "tissue" compartment is the sum of the partial pressures of the inert gases present in the compartment, even though the various inert gases each have a different half-time for that compartment.

Mixed gas decompression algorithms must deal with more than one inert gas in the breathing mix, such as helium and nitrogen in trimix. M-values for this situation are handled differently by the

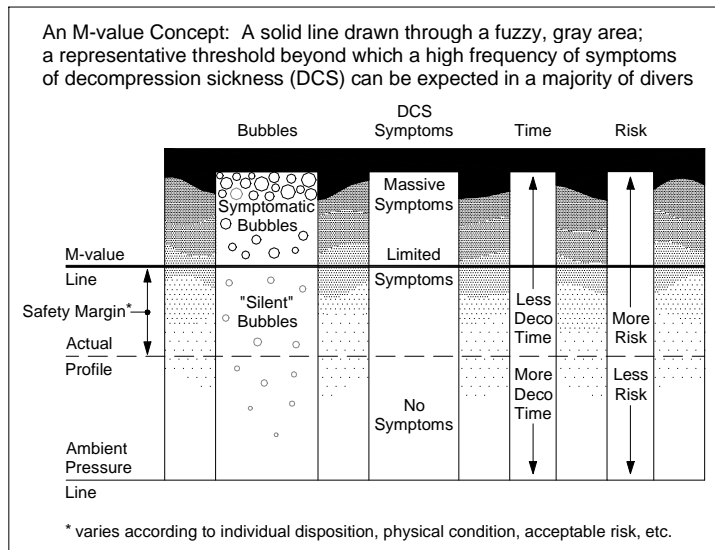

various algorithms. Some methodologies use the same M-values for both nitrogen and helium; usually they are based on the M-values for nitrogen. In the Buhlmann algorithm, an intermediate M-value is calculated which is an adjustment between the separate M-values for nitrogen and helium based on the proportion of these inert gases present in the compartment. In the M-value linear equation, the Coefficient a (He+N₂) and the Coefficient b (He+N₂) are computed in accordance with the partial pressures of helium (P_{He}) and nitrogen (P_{N₂}) as follows:

$$a \text{ (He+N}_2\text{)} = [a \text{ (He)} \cdot P_{\text{He}} + a \text{ (N}_2\text{)} \cdot P_{\text{N}_2}] / [P_{\text{He}} + P_{\text{N}_2}];$$

$$b \text{ (He+N}_2\text{)} = [b \text{ (He)} \cdot P_{\text{He}} + b \text{ (N}_2\text{)} \cdot P_{\text{N}_2}] / [P_{\text{He}} + P_{\text{N}_2}].$$

WHAT DO M-VALUES REPRESENT?

A misconception among some divers is that M-values represent a hard line between "getting the bends" and "not getting the bends." This might explain why some divers routinely push the limits of their tables or dive computer. The experience of diving medicine has shown that the established limits (M-values) are sometimes inadequate. The degree of inadequacy is seen to vary with the individual and the situation. Accordingly, it may be more appropriate to describe an M-value as "a solid line drawn through a fuzzy, gray area" (see Figure 2). The reasons for this lack of definitude involve complex human physiology, variations among individuals, and predisposing factors for decompression sickness.

Overall, the dissolved gas model has worked well for divers and the knowledge base has continued to grow. For example, it was originally presumed that all inert gas had to remain dissolved in solution and that any bubbles were indicative of DCS. However, we now know that silent bubbles are present even during symptom-free dives. Thus, the reality is that there is a combination of two conditions during a dive - most of the inert gas presumably in solution and some of the inert gas out of solution as bubbles. An M-value, therefore, represents not only a tolerable overpressure gradient, but a tolerable amount of bubbles as well. M-values are empirically verified, meaning that actual decompression trials are carried out with human subjects. These tests are conducted with a relatively small number of subjects intended to represent the much larger population of divers. Even though good data is obtained about the approximate threshold for symptoms of decompression sickness (M-values), this process cannot accurately predict or guarantee an absolute threshold for everyone. Also, we know from experience that certain factors are predisposing for decompression sickness: lack of physical conditioning, fattiness, fatigue, drugs/alcohol, dehydration, over-exertion, very cold water, open patent foramen ovale (PFO), etc. Individual susceptibility can vary on a daily basis as well.

M-VALUES AND CONSERVATISM

Limited symptoms, if any, and a reasonably low level of risk are associated


with M-values. This criteria, however, may not be entirely acceptable to all divers. Many divers would like to be in the range of "no symptoms" and "very low level of risk" when it comes to their decompression profiles. Fortunately, it is well understood among decompression modelers and programmers that calculations based on the established M-values alone cannot produce sufficiently reliable decompression tables for all individuals and all scenarios. This is why decompression programs provide for a means of introducing conservatism into the calculations.

Some of the methodologies include increasing the inert gas fractions used in the calculations, applying a depth safety factor which calculates for a deeper-than-actual dive depth, calculating for a longer-than-actual bottom time, and adjusting the half-times to be asymmetrical during off-gassing (slower). Some programs use more than one of these methods combined. These methodologies for conservatism are effective when properly applied. The degree of "effectiveness" is usually gauged by divers in terms of how much longer and deeper the decompression profiles become, and through individual experience with the outcome of the profiles.

M-VALUE RELATIONSHIPS

Some fundamental relationships involving M-values and decompression calculations are indicated on the pressure graph in Figure 3. The Percent M-value calculation has been used by various decompression modelers over the years. Professor Buhlmann, for example, evaluated many of his decompression trials on a Percent M-value basis and reported the data as such in his book(s).

The Percent M-value Gradient calculation is a measure of how far a decompression profile has entered into the decompression zone." 0% M-value Gradient is at the ambient pressure line and represents the bottom of the decompression zone. 100% M-value Gradient is at the M-value line and represents the top of the decompression zone.

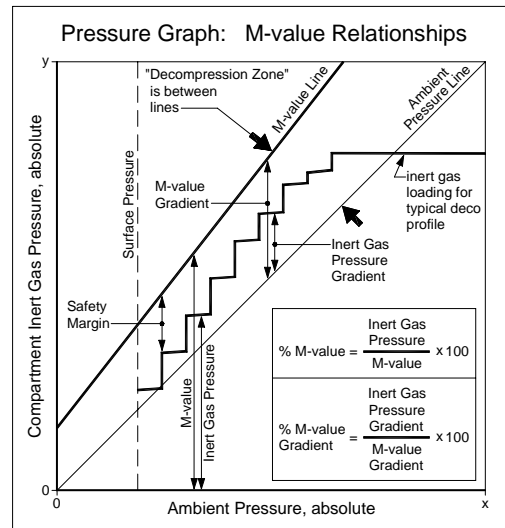

ANALYSIS OF PROFILES

Many divers would like to know precisely what the effect is of the conservatism factors in their desktop decompression program(s). They realize that longer and deeper profiles are generated with increasing conservatism factors, but more fundamental information is desired.

Both the Percent M-value and Percent M-value Gradient relationships are useful for the analysis and evaluation of decompression profiles. Using a standard set of reference M-values, different profiles can be evaluated on a consistent basis. This includes comparison of profiles generated by entirely different programs, algorithms, and decompression models.

UNIVERSAL REFERENCE VALUES

The Buhlmann ZH-L16 M-values are employed in most, if not all, of the desktop decompression programs in use by technical divers. These M-values were developed and tested for a broad range of ambient pressure exposures; from high altitude diving to deep sea diving. When used with appropriate conservatism, they have proven to be "reliable" for technical diving (to the extent that something can be reliable in an inexact science). They have become the de facto world-wide standard that can serve as universal reference values for the comparison and evaluation of decompression profiles.

Table 5: Effect of Conservatism Factors in a Commercially-Available Program on Decompression Profiles Referenced to Bühlmann ZH-L16 M-values (ZH-L16A Helium, ZH-L16B Nitrogen) 15/40 Trimix Dive (15% O ₂ / 40% He) to 250 fsw for 30 min. Deco mixes - Nitrox 36% at 110 fsw, 100% O ₂ at 20 fsw											
0% Conservatism Factor				50% Conservatism Factor				100% Conservatism Factor			
Deco Stop (fsw)	Run Time (min)	Maximum * % M-value (Cpt No.)	Maximum * % M-value Gradient (Cpt No.)	Deco Stop (fsw)	Run Time (min)	Maximum * % M-value (Cpt No.)	Maximum * % M-value Gradient (Cpt No.)	Deco Stop (fsw)	Run Time (min)	Maximum * % M-value (Cpt No.)	Maximum * % M-value Gradient (Cpt No.)
								140	35	74.3% (4)	29.3% (3)
								130	37	76.0% (4)	31.0% (3)
				120	35	81.6% (4)	47.0% (3)	120	40	77.4% (4)	33.9% (4)
110	36	85.8% (4)	59.4% (4)	110	38	84.5% (4)	55.7% (4)	110	43	77.6% (4)	35.5% (4)
				100	39	79.0% (5)	39.4% (4)	100	45	75.4% (5)	22.6% (4)
90	38	89.0% (4)	69.3% (4)	90	41	82.1% (5)	46.0% (4)	90	49	76.5% (6)	26.3% (5)
80	41	89.5% (5)	69.1% (4)	80	45	83.2% (5)	49.1% (5)	80	53	76.3% (6)	20.3% (5)
70	44	88.3% (5)	65.6% (5)	70	49	82.2% (6)	42.5% (5)	70	58	77.0% (6)	22.1% (6)
60	48	89.8% (6)	67.2% (6)	60	55	83.2% (6)	45.1% (6)	60	68	78.2% (7)	24.9% (6)
50	55	91.1% (6)	72.2% (6)	50	64	83.1% (7)	44.1% (6)	50	78	76.9% (7)	17.6% (7)
40	64	90.3% (7)	67.7% (7)	40	75	83.1% (7)	42.8% (7)	40	96	78.4% (8)	22.5% (7)
30	79	90.7% (7)	70.7% (7)	30	95	84.5% (8)	46.0% (7)	30	124	78.3% (8)	22.4% (8)
20	94	90.9% (8)	70.7% (8)	20	113	84.2% (9)	47.1% (8)	20	147	78.9% (9)	24.4% (9)
10	119	91.1% (9)	72.2% (9)	10	144	85.8% (10)	51.7% (10)	10	189	81.2% (11)	32.6% (10)
0	120	93.6% (11)	80.2% (11)	0	145	88.6% (12)	62.6% (12)	0	190	84.9% (13)	46.6% (13)

* Upon Arrival at the Stop

It is a relatively easy task for programmers to include Percent M-value and Percent M-value Gradient calculations in summary form with the decompression profiles. Table 5 is an example of this and shows the effect of conservatism factors used in a commercially-available desktop decompression program. At 0% Conservatism Factor, the decompression profile is in the 90% M-value range and has entered approximately 70% into the decompression zone (70% M-value Gradient). It is evident that this program employs a level of baseline conservatism since none of the values reaches 100%. At 50% Conservatism Factor (which is recommended in the user's manual), the profile is in the 85% M-value range and has entered approximately 40-50% into the decompression zone. At 100% Conservatism Factor, the profile is in the 77% M-value range and has entered approximately 20-35% into the decompression zone. Note that the values given in Table 5 are upon arrival the respective stops which is the worst-case condition. This correlates with the edges of the "stair-steps" in the gas loading profile on the pressure graph (see example in Figure 3). The highest values across all profiles are calculated upon arrival at the surface which illustrates why a very slow final ascent from the last decompression stop to the surface is always prudent.

MARGIN OF SAFETY

Using the M-value relationships and a standard set of reference M-values, divers

can determine personal decompression limits which are both well-defined and transportable. The margin of safety selected will depend on individual disposition and prior experience with profiles. An honest assessment of one's fitness for decompression diving is always in order. For example, this author/diver (an office worker) has chosen a personal limit of 85% M-value and 50-60% M-value Gradient for typical trimix dives.

To ensure a fixed margin of safety, a decompression profile can be calculated directly to a predetermined percentage of the M-value Gradient. The advantage of this approach is complete consistency across the entire ambient pressure range and precise control over the resultant profile.

About the Author

Erik C. Baker is an electrical engineer with an architecture/engineering firm in Pennsylvania. He pursues research into decompression and diving physiology as a hobby, and has developed several FORTRAN computer programs for decompression calculation and analysis. Erik is a certified cave diver and trimix diver.

Decompression References:

Bennett PB, Elliott DH, eds. 1993. The Physiology and Medicine of Diving. London: WB Saunders.

Boycott AE, Damant GCC, Haldane JS. 1908. The prevention of compressed air illness. *J Hyg (London)* 8:342-443.

Buhlmann, AA. 1984. Decompression-Decompression Sickness. Berlin: Springer-Verlag.

Buhlmann, AA. 1995. Tauchmedizin. Berlin: Springer-Verlag.

Hamilton RW, Muren A, Rockert H, Ornhagen H. 1988. Proposed new Swedish air decompression tables. In: Shields TG, ed. XIVth Annual Meeting of the EUBS. European Undersea Biomedical Society. Aberdeen: National Hyperbaric Center.

Hamilton RW, Rogers RE, Powell MR, Vann RD. 1994. Development and validation of no-stop decompression procedures for recreational diving: The DSAT Recreational Dive Planner. Santa Ana, CA: Diving Science and Technology Corp.

Schreiner HR, Kelley PL. 1971. A pragmatic view of decompression. In: Lambertsen CJ, ed. Underwater Physiology IV. New York: Academic Press.

Wienke BR. 1991. Basic decompression theory and application. Flagstaff, AZ: Best.

Wienke BR. 1994. Basic diving physics and applications. Flagstaff, AZ: Best.

Workman RD. 1965. Calculation of decompression schedules for nitrogen-oxygen and helium-oxygen dives. Research Report 6-65. Washington: Navy Experimental Diving Unit.

Workman RD. 1969. American decompression theory and practice. In: Bennett PB, Elliott DH, eds. The physiology and medicine of diving and compressed air work. London: Bailliere, Tindall & Cassell.x